EuroTec INTERNATIONAL PLC

Tel: 44 (0) 1420 538500 Fax: 44 (0) 1420 538111
Email: Info@eurotec-intl.co.uk

To: FARNELL
FTAO: MARTIN
FROM: VERONICA (2 PAGES)

25mm Mylar dome tweeter

- 25mm Mylar dome tweeter
- Ferrofluid cooled and damped
- Square plastic moulded bezel

59-CDE.25-03F

Technical Specification:

Magnet Ø	33 x 8	*mm*
Nominal Impedance	8	*Ohms*
Output S.P.L 1W @ 1m	87	*dB*
Frequency Response	2 - 20	*KHz*
Rated Power Input	10	*Watts rms*
Voice coil Ø	13	*mm*
Mounting depth (from rear)	-	*mm*
Speaker weight	-	*g*

After the following tests the speaker operates normally

Load test: 10 Watts of White noise for 24 Hrs

Heat test: 55 ±2°C for 16 Hrs

Humidity test: 45 ±2°C for 96 Hrs @ 90% R.H.

Thiele Small Parameters:

Fs	not tested	*Hz*
Re		*Ohms*
Res		*Ohms*
Qms		
Qes		
Vas(Sd)		*Litres*
Mms		*grams*
Cms		*µm/Newton*
Bl		*Tesla-m*

Remarks:

Available with a rectangle mounting plate part number:

59-CDE.25-02F

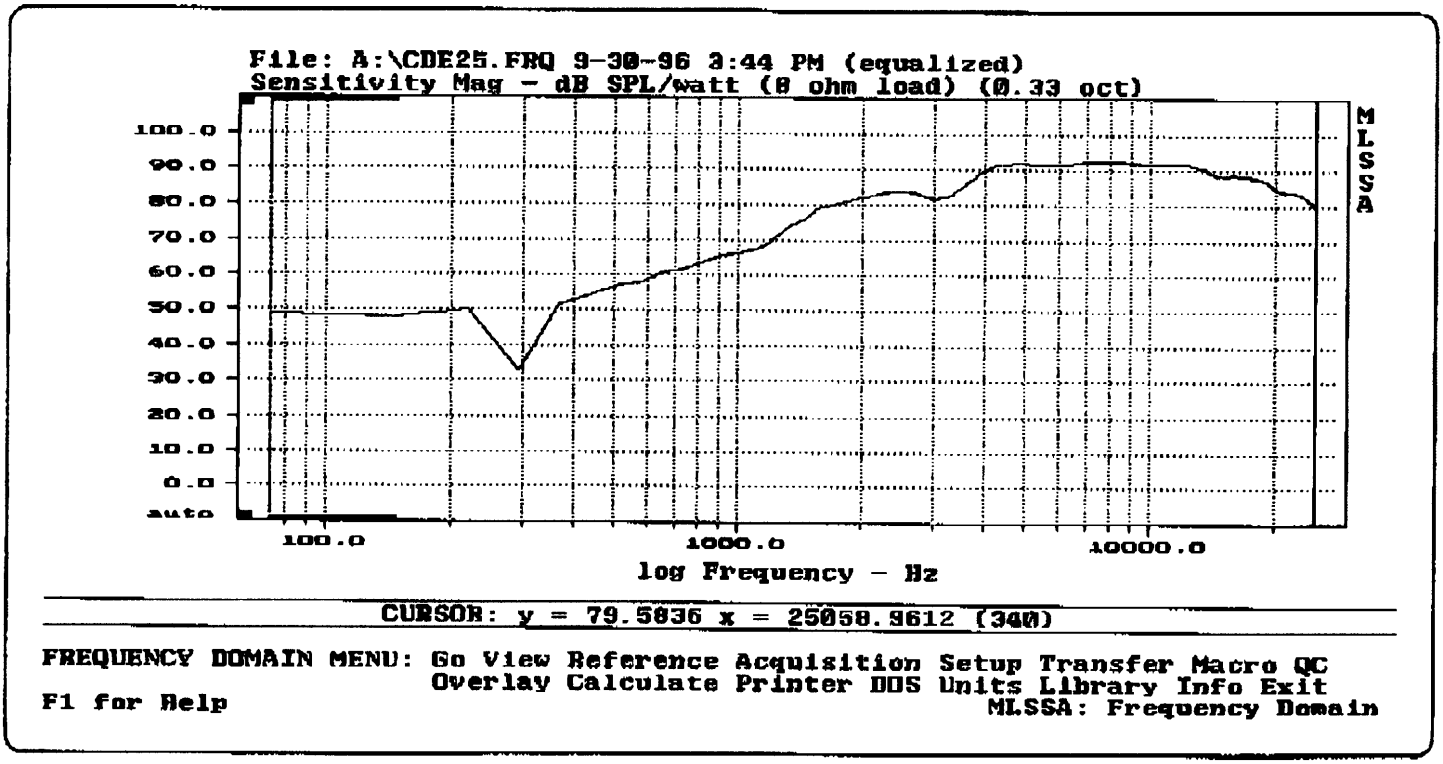

59-CDE.25-03F

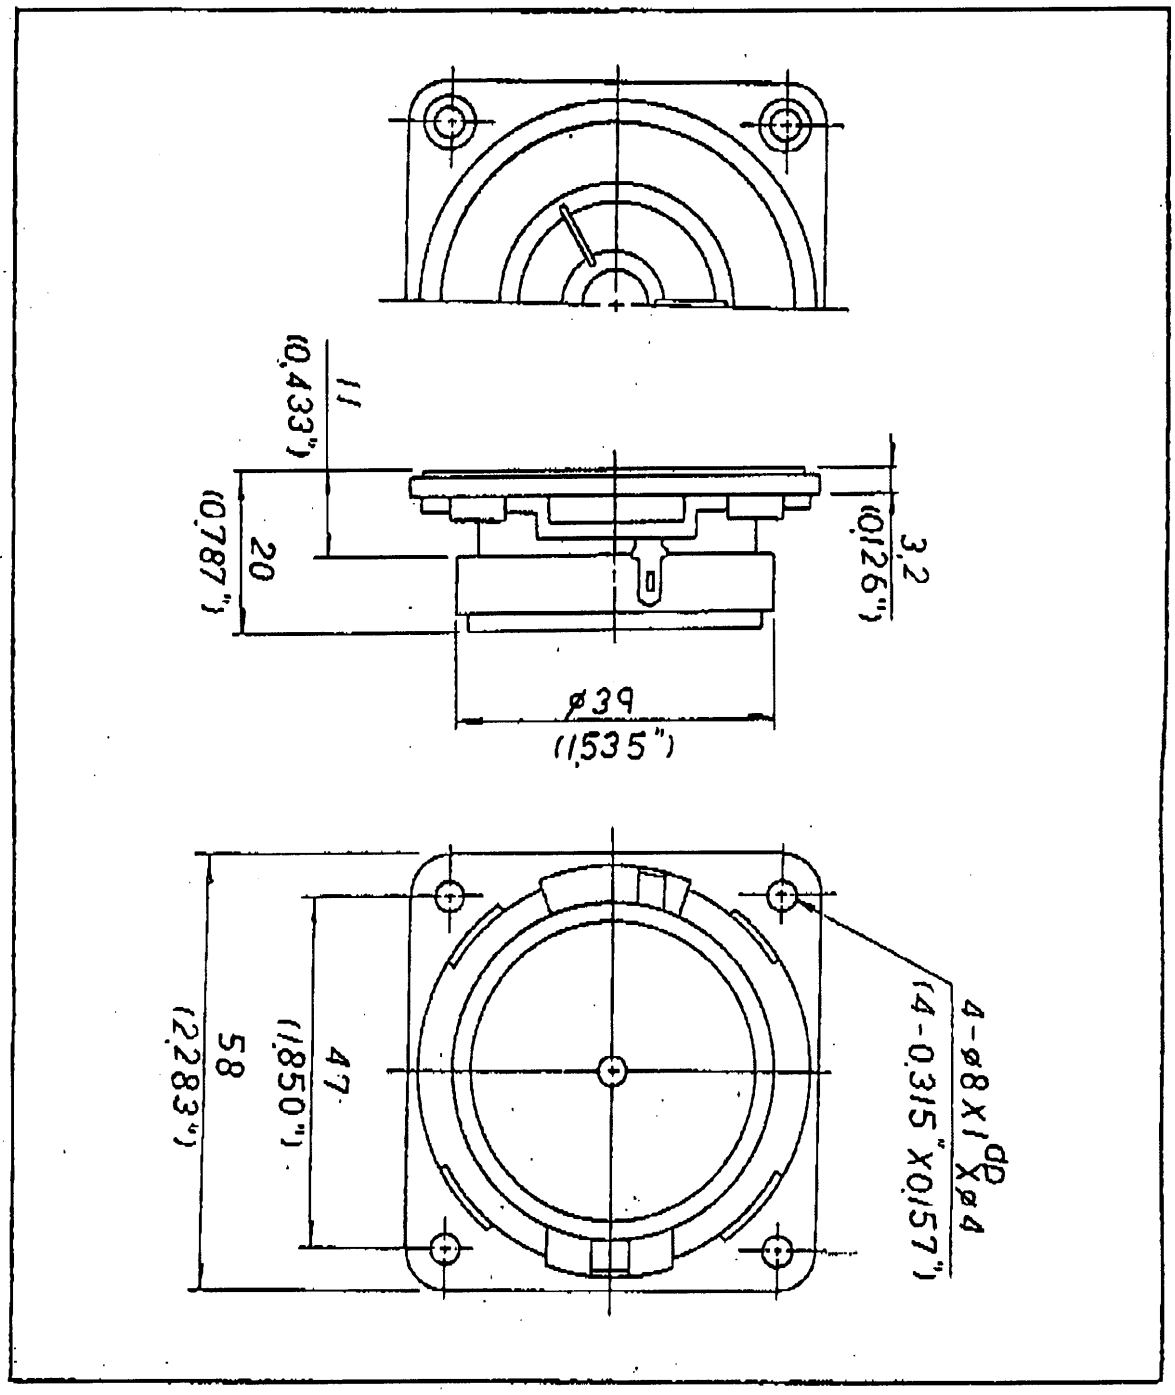
11
(0.433")
20
(0.787")
3.2
(0.126")
ø39
(1.535")
58
(2.283")
47
(1.850")
4-ø8X1 DP
4-0.315"X0.157"
Xø4